

Mecalac

RANGE

GAMME / BAUREIHE / GAMMA



RANGE
GAMME / BAUREIHE / GAMMA
Mecalac

ZERO EMISSION



► e12



CONCEPT

► eMWR



► eS1000



NEW

► eS900tele



► eMDX

CONTENTS

► E12	10
► EMWR	11
► ES1000	12
► ES900TELE	13
► EMDX	14

EXCAVATORS / PELLES / BAGGER / ESCAVATORI



CONTENTS

► 12MSX	15
► 12MTX	16
► 12MRX	17
► 7MWR	18/19
► 9MWR	20
► 11MWR	21
► 15MWR	22/24

EXCAVATORS / PELLES / BAGGER / ESCAVATORI



► **6MCR**
MECALAC
VERSATILE
BOOM



► **6MCR**
TWO-PIECE
BOOM WITH
OFFSET



► **8MCR**



► **10MCR**



► **15MC**
MECALAC
VERSATILE
BOOM



► **15MC**
TWO-PIECE
BOOM



► **15MC**
TWO-PIECE
BOOM WITH
OFFSET

CONTENTS

► 6MCR	25/26
► 8MCR	27
► 10MCR	28
► 15MC	29/31

RAIL-ROAD EXCAVATORS / PELLES RAIL-ROUTE / GLEISBAU / ESCAVATORI STRADA-FERROVIA



► 106MRail



► 136MRail



► 156MRail



► 216MRail

CONTENTS

► 106MRail	32
► 136MRail	33
► 156MRail	34
► 216MRail	35

LOADERS / CHARGEUSES / RADRADLADER / PALE CARICATRICI



CONTENTS

► MCL2	36	► AF1200	46
► MCL4	37	► AS600	47
► MCL4+	38	► AS750	48
► MCL6	39	► AS850	49
► MCL6+	40	► AS1000	50
► MCL8	41	► AS1600	51
► AX700	42	► AS210	52
► AX850	43	► AS900tele	53
► AX1000	44	► AT900	54
► AF1050	45	► AT1050	55

BACKHOE LOADERS / CHARGEUSES-PELLETEUSES / BAGGERRADLADER / TERNE



CENTER MOUNT

► **TLB830**



SIDESHIFT

► **TLB870**



► **TLB880**



► **TLB890**



► **TLB990**



SIDESHIFT – ROTATING CAB*

► **REVO990**



NEW

CONTENTS

CENTER MOUNT

► TLB830	56
-----------------	----

SIDESHIFT

► TLB870	57
-----------------	----

► TLB880	58
-----------------	----

► TLB890	59
-----------------	----

► TLB990	60
-----------------	----

SIDESHIFT – ROTATING CAB

► REVO990	61
------------------	----

* Cabine rotative / Drehbare kabine / Cabina girevole

SITE DUMPERS / MOTOBASCULEURS / BAUSTELLENKIPPER / DUMPER



TA

► TA1EH



► TA2SH / TA2SEH



► TA3H / TA3SH



► TA3.5SH



► TA6H / TA6SH



► TA9H



MDX CAB

► 3.5MDX



► 6MDX



► 9MDX



REVOTrUCK

► REVOTrUCK 6



► REVOTrUCK 9



CONTENTS

TA

► TA1EH	62	MDX CAB	
► TA2SH / TA2SEH	63	► 3.5MDX	68
► TA3H / TA3SH	64	► 6MDX	69
► TA3.5SH	65	► 9MDX	70
► TA6H / TA6SH	66	REVOTrUCK	
► TA9H	67	► REVOTrUCK 6	71
		► REVOTrUCK 9	71

COMPACTION ROLLERS / COMPACTEURS À ROULEAUX / VERDICHTUNGSGERÄTE / RULLI COMPATTATORI



► MBR71



CONTENTS

► MBR71

72

P12

kg	kW.h	km/h	mm	daN	daN
11300 (24,900 lbs)	150	25 (15.5 mph)	2710 (8'10")	6150 (13,825 lbf)	3400 (7,640 lbf)

mm	mm	mm
7125 (23'5")	-4100 (-13'5")	+6100 (+20')

AUTONOMY - CHARGE
Indicative values depending on application type and subject to environmental conditions / Valeurs indicatives sujettes au type d'utilisation et conditions d'environnement / Richtwert, abhängig von der Einsatzweise und den Umgebungsbedingungen / Valori indicativi soggetti al tipo di utilizzo e alle condizioni ambientali

CMWR**CONCEPT**

kg	kW.h	km/h	mm	daN	daN
9750 (21,495 lbs)	75	20**/25 (12.4** / 15.5 mph)	2866 (9'40")	2700 (6,070 lbf)	5100 (11,465 lbf)

mm	mm	mm
6220 (20'4")	-3030 (-9'9")	+5500 (+18')

AUTONOMY - CHARGE

Indicative values depending on application type and subject to environmental conditions / Valeurs indicatives sujettes au type d'utilisation et conditions d'environnement / Richtwert, abhängig von der Einsatzweise und den Umgebungsbedingungen / Valori indicativi soggetti al tipo di utilizzo e alle condizioni ambientali

* Avec 1h de charge dans la journée / Mit 1 std. Ladezeit während des Tages / Con 1 ora di ricarica durante il giorno – ** Option /optional / opzione

PS10000

8h ⚡	4h ⚡	kg	kW.h	km/h	mm mm	mm mm	mm mm	m³
		7430 (16,380 lbs)	75	20*/25 (12.4** / 15.5 mph)	5690 (18'8")	2100 (6'10")	2830 (9'3")	+2650 (+8'8")





AUTONOMY - CHARGE

Indicative values depending on application type and subject to environmental conditions / Valeurs indicatives sujettes au type d'utilisation et conditions d'environnement / Richtwert, abhängig von der Einsatzweise und den Umgebungsbedingungen / Valori indicativi soggetti al tipo di utilizzo e alle condizioni ambientali

ES900 TELE

NEW

		 kg	 kW.h	 km/h	 mm	 mm	 mm	 m³
7580 (16,711 lbs)	75	20*/25 (12.4** / 15.5 mph)	6270 (20'6")	2060 (6'7")	2910 (9'6")	+4490 (+14'7")	0.9 (1.2 yd³)	



AUTONOMY - CHARGE

Indicative values depending on application type and subject to environmental conditions / Valeurs indicatives sujettes au type d'utilisation et conditions d'environnement / Richtwert, abhängig von der Einsatzweise und den Umgebungsbedingungen / Valori indicativi soggetti al tipo di utilizzo e alle condizioni ambientali

* Option /optional / opzione

EMDX

								
		6000 (13,228 lbs)	75	20 (12 mph)	2211 (7'2")	4711 (15'5")	6000 (13,230 lbs)	2875 (9'4")




AUTONOMY - CHARGE


Indicative values depending on application type and subject to environmental conditions / Valeurs indicatives sujettes au type d'utilisation et conditions d'environnement / Richtwert, abhängig von der Einsatzweise und den Umgebungsbedingungen / Valori indicativi soggetti al tipo di utilizzo e alle condizioni ambientali



kg	kW	mm km/h	mm daN	mm daN
9600-10600 (21,164-23,369 lbs)	55 (75 hp / 74.4 imperial hp)	25 (15.5 mph)	2710 (8'10")	5550 (12,475 lbf)

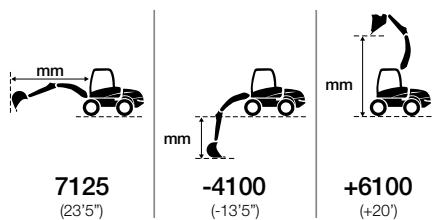

kg	kW	mm	daN	daN
9700-10800 (21,385-23,81 lbs)	85 (115 hp / 114 imperial hp)	32 (20 mph)	2710 (8'10")	6150 (13,825 lbf) 3400 (7,640 lbf)

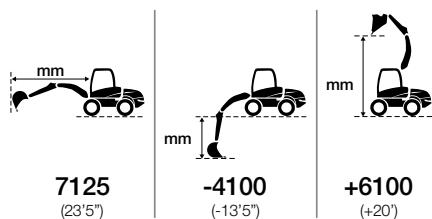



NEW



kg

10400-11200
(22,928-24,692 lbs)



kW

85
(115 hp /
114 imperial hp)



km/h

40
(25 mph)



mm
daN

2710
(8'10")




daN

6150
(13,825 lbf)




daN


3400
(7,640 lbf)



7125
(23'5")



-4100
(-13'5")



+6100
(+20')



MECALAC VERSATILE BOOM



	kg	kW	km/h	mm daN	daN
6925/ 7350*	(15,267/16,204* lbs)	55.4 (75 hp / 74.3 imperial hp)	30 (19 mph)	2788 (9'2")	4050 (9,100 lbf) 2400 (5,400 lbf)

mm daN	mm daN	mm daN
6220 (20'5")	-3030 (-9'11")	+4970 (+16'4")

* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione

RANGE / GAMME / BAUREIHE / GAMMA



OFFSET TWO-PIECE BOOM



kg	kW	km/h	mm	daN	daN
7000/ 7420* (15,430/16,360* lbs)	55.4 (75 hp / 74.3 imperial hp)	30 (19 mph)	2659 (8'8")	4050 (9,100 lbf)	3100 (6,970 lbf)

mm	mm	mm
6400 (21'0")	-3318 (-10'10")	+5070 (+16'7")

* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione



kg	kW	km/h	mm	daN	daN
7900/ 9000* (17,416/19,841* lbs)	55.4 (75 hp / 74.3 imperial hp)	20/35 (12/22 mph)	2866 (9'5")	5100 (11,460 lbf)	2700 (6,070 lbf)

mm	mm	mm
6700 (22')	-3500 (-11'6")	+5500 (+18')

* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione



kg	kW	km/h	mm	daN	daN
10000/ 11000* (22,050/24,250* lbs)	55.4 (75 hp / 74.3 imperial hp)	20/30 (12/19 mph)	3296 (10'8")	6500 (14,600 lbf)	3300 (7,400 lbf)

mm	mm	mm
7500 (24'7")	-3800 (-12'6")	+6200 (+20'4")

* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione

15MWR

MECALAC VERSATILE BOOM



kg	kW	km/h	mm	daN	daN
14200/ 15300*	100 (136 hp / 134 imperial hp)	35 (22 mph)	3415 (11'2")	8170 (18,365 lbf)	5500 (12,365 lbf)

mm	mm	mm
8300 (27'3")	-4550 (-14'11")	+6990 (+22'11")

* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione


RANGE / GAMME / BAUREIHE / GAMMA

15MWR

TWO-PIECE BOOM



	14200/ 15300* (31,305/33,730* lbs)		100 (136 hp / 134 imperial hp)		35 (22 mph)		2990 9'10")		8170 (18,365 lbf)		6200 (13,940 lbf)
--	--	--	---	--	-----------------------	--	-----------------------	--	-----------------------------	--	-----------------------------

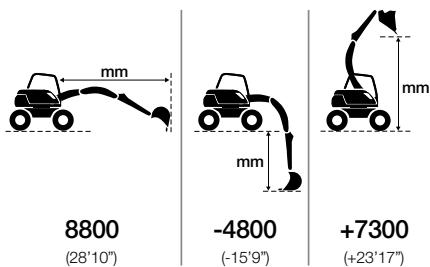

* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione

15MWR

OFFSET TWO-PIECE BOOM



kg	kW	km/h	mm	daN	daN
14800/ 15500* (32,830/34,171* lbs)	100 (136 hp / 134 imperial hp)	35 (22 mph)	2990 (9'10")	8170 (18,365 lbf)	6200 (13,940 lbf)


mm	mm	mm
8700 (28'7")	-4700 (-15'5")	+7200 (+23'7")



MECALAC VERSATILE BOOM



	kg	kW	km/h	mm	daN	daN
5700/ 6100* (12,566/13,450* lbs)	55.4 (75 hp / 74.3 imperial hp)	10 (6 mph)	2618 (8'7")	4050 (9,100 lbf)	2400 (5,400 lbf)	

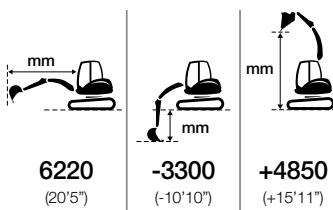

* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione



OFFSET TWO-PIECE BOOM



**5770/
6170***
(12,720/13,600* lbs)



55.4
(75 hp /
74.3 imperial hp)



10
(6 mph)




2540
(8'4")



4050
(9,100 lbf)




3100
(6,970 lbf)



6400
(21'0")



-3380
(-11'1")



+4950
(+16'3")

* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione



**7200/
7600***

(15,900/16,755* lbs)
74.3 imperial hp)



55.4

(75 hp /
6 mph)



10

(8'10")



2698

(11,460 lbf)




5100

(11,460 daN)



2700


(6,070 lbf)

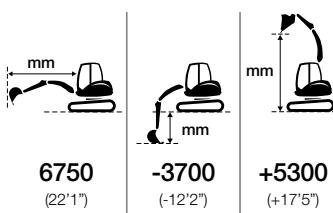

* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione

10MCR

9400/ 10000* (20,723/22,046* lbs)	55.4 (75 hp / 74.3 imperial hp)	9 (5.6 mph)	3266 (10'8")	6500 (14,600 lbf)	3300 (7,400 lbf)	

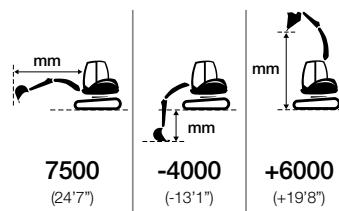




MECALAC VERSATILE BOOM



	14780/15230* (32,585/33,580* lbs)		100 (136 hp / 134 imperial hp)		6 (3.7 mph)		3415 (11'2")		8170 (18,370 lbf)		5500 (12,360 lbf)
--	---	--	--	--	-----------------------	--	------------------------	--	-----------------------------	--	-----------------------------

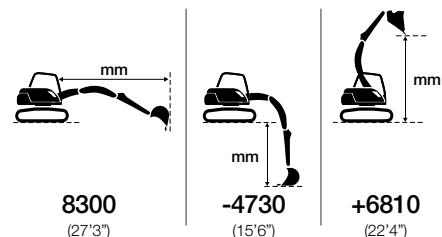

* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione

15MC

TWO-PIECE BOOM



kg



kW



km/h



mm



daN



daN

14200/15300*
(31,305/33,730^o lbs)**100**
(136 hp /
134 imperial hp)**6**
(3.7 mph)**2990**
(9'10")**8170**
(18,370 lbf)**6200**
(13,940 lbf)

mm


8800
(28'10")mm
-4980
(16'4")mm
+7120
(23'4")

* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione

RANGE / GAMME / BAUREIHE / GAMMA

15MC

OFFSET TWO-PIECE BOOM

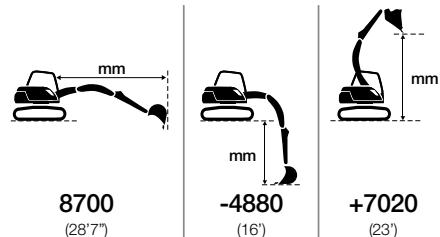**14850/15500***
(32,740/34,170* lbs)**100**
(136 hp /
134 imperial hp)**6**
(3.7 mph)**2990**
(9'10")**8170**
(18,370 lbf)**6200**
(13,940 lbf)

* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione

106M
r a i l

	kg	kW	km/h on-rail	km/h on-ground	mm on-rail	mm on-rail	
	9475* (20,889* lbs)	55.4 (75 hp / 74.3 imperial hp)	0-23** (0-14.3** mph)	10 (6.2 mph)	3095 (10'1")	2749 (9'0.2")	6750 (22'2")



RANGE / GAMME / BAUREIHE / GAMMA

* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione

** Depending on the national regulation / Selon spécification nationale / Abhängig von der Regelung des Landes / A seconda delle norme nazionali

126M
r a i l


	kg	kW	km/h on-rail	km/h on-ground	mm	mm on-rail	mm
12830* (28,285* lbs)	55.4 (75 hp / 74.3 imperial hp)	0-20** (12.4** mph)	9 (5.6 mph)	3412 (11'2")	3220 (10'7")	7500 (24'7")	



* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione

** Depending on the national regulation / Selon spécification nationale / Abhängig von der Regelung des Landes / A seconda delle norme nazionali

156M
r a i l



16360*
(36,067* lbs)

100
(136 hp /
134 imperial hp)

30**

(18.6** mph)
(21 mph)

3588
(11'9")

3917
(12'10")

8300
(27'3")



* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione



RANGE / GAMME / BAUREIHE / GAMMA

** Depending on the national regulation / Selon spécification nationale / Abhängig von der Regelung des Landes / A seconda delle norme nazionali

216M
r a i l



mm
on rail and ground



20367*
(44,901* lbs)

100
(136 hp /
134 imperial hp)

30**
(18.5** mph)

3765
(12'4")

3768
(12'4")

8906
(29'3")



* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione

** Depending on the national regulation / Selon spécification nationale / Abhängig von der Regelung des Landes / A seconda delle norme nazionali



kg	kW	km/h	mm	mm	mm	m³	
1930* (4,255 lbs*)	18.4 (25 hp / 24.6 imperial hp)	12 (7 mph)	3627 (11'10")	1040 (3'4")	2140 (7'0")	+2008 (+6'7")	0.43 (0.56 yd³)



* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione



kg	kW	km/h	mm	mm	mm	m³	
2430* (5,357 lbs*)	18.4 (25 hp / 24.6 imperial hp)	20 (12 mph)	4154 (13'7")	1100 (3'7")	2258 (7'4")	+2170 (+7'1")	0.43 (0.56 yd³)



* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione

MCL⁴⁺

SHORT BOOM

 kg	 kW	 km/h	 mm	 mm	 mm	 m ³	
2370* (5,225 lbs*)	18.4 (25 hp / 24.6 imperial hp)	20 (12 mph)	4104 (13'5")	1100 (3'7")	2258 (7'4")	+1800 (+5'10")	0.43 (0.56 yd ³)



* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione

MCL⁶

 kg	 kW	 km/h	 mm	 mm	 mm	 m ³
2480* (5,467 lbs*)	36.4 (49.5 hp / 48.8 imperial hp)	20/30** (12/19* mph)	4279 (14'0")	1100 (3'7")	2258 (7'4")	+2170 (+7'1")



* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione
** Option /optional / opzione

MCL⁶⁺

SHORT BOOM

 kg	 kW	 km/h	 mm	 mm	 mm	 m³	
2420* (5,335 lbs*)	36.4 (49.5 hp / 48.8 imperial hp)	20/30** (12/19* mph)	4230 (13'4"10")	1100 (3'7")	2258 (7'4")	+1800 (+5'10")	0.43 (0.56 yd³)



* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione

RANGE / GAMME / BAUREIHE / GAMMA

** Option /optional / opzione



kg	kW	km/h	mm mm	mm mm	mm mm	m³
2900* (6,393 lbs*)	36.4 (49.5 hp / 48.8 imperial hp)	20/30** (12/19* mph)	4490 (14'8")	1330 (4'4")	2290 (7'6")	+2301 (+7'6")



* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione

** Option /optional / opzione

AX 700

kg	kW	km/h	mm	mm	mm	m ³
4710 (10,380 lbs)	50 (68 hp / 67 imperial hp)	20/30* (12/19* mph)	5285 (17'4")	1600 (5'3")	2470 (8'1")	+2475 +2785* (+8'1"/+9'2" *) 0.7 - 1.2 (0.92 - 1.6 yd ³)



RANGE / GAMME / BAUREIHE / GAMMA

* Option /optional / opzione

AX 850

kg	kW	km/h	mm	mm	mm	m ³
5050 (11,133 lbs)	50 (68 hp / 67 imperial hp)	20/30'/40* (12'19"/25' mph)	5285 (17'4")	1850 (6'1")	2470 (8'1")	+2475 +2785* (+8'1"/+9'2"*)



* Option /optional / opzione

AX 1000

kg	kW	km/h	mm mm	mm mm	mm mm	mm m³
5410 (11,927 lbs)	55.4 (75 hp / 74.3 imperial hp)	20 30°/40°* (12/19°/25° mph)	5350 (17'7")	1850 (6'1")	2440 (8')	+2400 +2710* (+7'10"/+8'10")



RANGE / GAMME / BAUREIHE / GAMMA

* Option / optional / opzione

AF 1050

kg	kW	km/h	mm	mm	mm	m ³	
5800 (12,786 lbs)	55.4 (75 hp / 74.3 imperial hp)	20 30°/40°* (12/19°/25° mph)	6030 (19'9")	2100 (6'11")	2830 (9'3")	+2700 (+8'10")	1.05 - 1.5 (1.4 - 2 yd ³)



* Option /optional / opzione

AF 1200

kg	kW	km/h	mm	mm	mm	m ³	
6000 (13,230 lbs)	55.4 (75 hp / 74.3 imperial hp)	20 30°/40° (12/19°/25° mph)	6080 (19'9")	2100 (6'11")	2830 (9'3")	+2700 (+8'10")	1.2 - 2.0 (1.6 - 2.6 yd ³)



RANGE / GAMME / BAUREIHE / GAMMA

* Option /optional / opzione

AS500

kg	kW	km/h	mm	mm	mm	m ³
4400 (9,700 lbs)	36.4 (49.5 hp / 48.8 imperial hp)	20/30* (12/19* mph)	4944 (16'2")	1700 (5'6")	2495 (8'2")	+2600 (+8'6")



* Option /optional / opzione

AS750

 kg	 kW	 km/h	 mm	 mm	 mm	 m³	
5000 (11,023 lbs)	45 (61.1 hp / 60.3 imperial hp)	20/30* (12/19* mph)	5010 (16'5")	1860 (6'1")	2495 (8'2")	+2560 (+8'5")	0.75 (0.98 yd³)



AS350

 kg	 kW	 km/h	 mm	 mm	 mm	 m³	
6270 (13,823 lbs)	55.4 (75 hp / 74.3 imperial hp)	20 30°/40°* (12/19°/25° mph)	5600 (18'4")	1950 (6'4")	2830 (9'3")	+2640 (+8'7")	0.85 (1.1 yd³)



* Option /optional / opzione

AS10000

kg	kW	km/h	mm	mm	mm	m ³	
6640 (14,639 lbs)	55.4 (75 hp / 74.3 imperial hp)	20 30°/40°* (12/19°/25° mph)	5600 (18'4")	2100 (6'10")	2830 (9'3")	+2650 (+8'8")	1.0 (1.3 yd ³)



RANGE / GAMME / BAUREIHE / GAMMA

* Option /optional / opzione

AS1600

 kg	 kW	 km/h	 mm	 mm	 mm	 m³	
10920 (24,074 lbs)	100 (136 hp / 134 imperial hp)	20/40* (12/25* mph)	6580 (21'7")	2480 (8'2")	3100 (10'2")	+3100 (+10'2")	1.6 - 2.5 (2.1 - 3.3 yd³)



* Option /optional / opzione

AS 210

 kg	 kW	 km/h	 mm	 mm	 mm	 m³
15100 (33,289 lbs)	129 (175 hp / 173 imperial hp)	20/35* (12/22* mph)	7285 (23'10")	2700 (8'10")	3155 (10'4")	+3420 (+11'3")



AS900 TELE

 kg	 kW	 km/h	 mm	 mm	 mm	 m³
7250 (15,983 lbs)	55.4 (75 hp / 74.3 imperial hp)	20 30'/35' (12'19"/22* mph)	6270 (20'7")	2100 (6'11")	2910 (9'7")	+3100 +4100* (+10'2" / +13'5")*



* Option /optional / opzione

AT 900

 kg	 kW	 km/h	 mm	 mm	 mm	 m³	 m³
6550 (14,440 lbs)	55.4 (75 hp / 74.3 imperial hp)	20 30°/40°* (12/19°/25° mph)	5850 (19'2")	2100 (6'11")	2910 (9'7")	+3200 +4080* (+10'6" / +13'5")*	0.9 - 1.5 (1.2 - 2 yd³)



AT 1050

kg	kW	km/h	mm mm	mm mm	mm mm	m ³
7150 (15,763 lbs)	55.4 (75 hp / 74.3 imperial hp)	20 30°/40°* (12/19°/25° mph)	5920 (19'5")	2100 (6'11")	2910 (9'7")	+3170 +4050 (+10'5" / +13'3")



* Option /optional / opzione

TLB830

CENTER MOUNT



kg	kW	km/h	mm	m³	mm	daN	daN	mm
7425 (16,369 lbs)	70 (95 hp / 94 imperial hp)	38 (24 mph)	2310 (7'6")	3488 (11'5")	1.0 (1.3 yd ³)	+3534 (+11'7")	4600 (10,340 lbf)	-4411/-5438* (-14'5" / -17'10")
								 5695/6670* (18'8" / 21'10")
								 +3569/+4168* (+11'9" / +13'8")
								 5400* (12,140* lbf)
								 3540/2600* (7,961/5,845* lbf)

TLB870

SIDESSHIFT



kg	kW	km/h	mm	m³	mm	daN	daN	mm
8040 (17,725 lbs)	Stage IIIB/ Stage v - 55.4 (75 hp / 74.3 imperial hp)	38 (24 mph)	2310 (7'6")	3827 (12'7")	1.0 (1.3 yd ³)	+3262 (+10'8")	4600 (10,340 lbf)	-4401/-5744* (-14'5" / -18'10")
	Stage IIIA - 70 (95 hp / 94 imperial hp)							
					mm	daN	daN	
					5725/6995* (18'9" / 22'11")	+3963/+4939* (+13'/ +16'2")	6870* (13,489* lbf)	daN
								daN
								daN

* Depending to configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione

TL8880

SIDESSHIFT



kg	kW	km/h	mm	m³	mm	daN	daN	mm
8060 (17,769 lbs)	Stage V - 74.5 (101 hp / 100 imperial hp)	40 (25 mph)	2310 (7'6")	3827 (12'7")	1.2 (1.6 yd ³)	+3262 (+10'8")	4600 (10,340 lbf)	-4401/-5744* (-14'5" / -18'10")
	Stage IIIA - 70 (95 hp / 94 imperial hp)							

mm	daN	daN	daN
5725/6995* (18'9" / 22'11")	+3963/+4939* (+13' / +16'2")	6780* (13,556* lbf)	4220/2870* (9,487/6,452* lbf)

TLB890

SIDESSHIFT



kg	kW	km/h	mm	m³	mm	daN	daN	mm
8283 (18,261 lbs)	Stage IIIA - 74.5 (101 hp / 100 imperial hp)	40 (25 mph)	2365 (7'9")	3813 (12'6")	1.2 (1.6 yd ³)	+3302 (+10'10")	5110 (11,487 lbf)	-4493/-5660* (-14'9"/-18'7")
	Stage V - 82 (110 hp / 109 imperial hp)							

mm	daN	daN
5879/6959* (19'3"/22'10")	+3968/+4600* (+13'0"+15'1")	6870 (15,445 lbf)
		4110/2900* (9,240/6,519* lbf)

* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione

TLB990

SIDESSHIFT



kg	kW	km/h	mm	m³	mm	daN	daN	mm
8453 (18,636 lbs)	Stage IIIA - 74.5 (101 hp / 100 imperial hp)	40 (25 mph)	2365 (7'9")	3893 (12'9")	1.2 (1.6 yd ³)	+3350 (+11'0")	5110 (11,487 lbf)	-4424/-5660* (-14'6"/-18'7")
	Stage V - 82 (110 hp / 109 imperial hp)							
			mm	mm	mm	daN	daN	mm
				5868/6959* (19'3" / 22'10")	+4036/+4600* (13'3"/15'1")	6870 (15,445 lbf)	4110/2900* (9,240/6,519* lbf)	


REVO990 **NEW**
SIDESHIFT – ROTATING CAB



 kg	 kW	 km/h	 mm	 m³	 mm	 daN	 daN	 mm
8970 (19,775 lbs)	Stage V - 82 (110 hp / 109 imperial hp)	40 (25 mph)	2365 (7'9")	3893 (12'9")	1.2 (1.6 yd³)	+3350 (+11'0")	5110 (11,488 lbf)	5540 (12,454 lbf)
								-4424/-5660* (-14'6"/-18'7")

* Depending on the configuration / Selon configuration / Abhängig von der Konfiguration / A seconda della configurazione

TA1EH



HYDROSTATIC



kg



kW



km/h



mm



mm



kg



mm

TA1EH

1375
(2,031 lbs)17.2
(23 hp / 22 imperial hp)12
(7.5 mph)985*/1100
(3'3"/3'7")*3006
(9'10")1000
(2,204 lbs)2837
(9'4")

RANGE / GAMME / BAUREIHE / GAMMA

* When fitted with optional narrow tyres.

TA2SH / SEH



HYDROSTATIC



kg



kW



km/h



mm



mm



kg




mm

TA2SH	2175 (4,795 lbs)	18.5 (25 hp / 24 imperial hp)	18 (11.2 mph)	1473 (4'10")	3606 (11'10")	2000 (4,410 lbs)	2928 (9'7")
--------------	----------------------------	---	-------------------------	------------------------	-------------------------	----------------------------	-----------------------

TA2SEH	2295 (5,059 lbs)	18.5 (25 hp / 24 imperial hp)	18 (11.2 mph)	1473 (4'10")	3606 (11'10")	2000 (4,410 lbs)	2928 (9'7")
---------------	----------------------------	---	-------------------------	------------------------	-------------------------	----------------------------	-----------------------



TA3H/SH



kg

kW

km/h

mm


kg

mm

TA3H	2315 (5,104 lbs)	18.5 (25 hp / 24 imperial hp)	14.8 (9.2 mph)	1957 (6'5")	3744 (12'3")	3000 (6,613 lbs)	2925 (9'7")
TA3SH	2450 (5,401 lbs)	18.5 (25 hp / 24 imperial hp)	14.8 (9.2 mph)	1846 (6'1")	3930 (12'11")	3000 (6,613 lbs)	2925 (9'7")



TA3.5sh



kg

kW

km/h

mm



kg

mm

TA3.5sh	2515 (5,544 lbs)	37 (50 hp / 49 imperial hp)	19* (12* mph)	1846 (6'1")	3930 (12'11")	3500 (7,716 lbs)	2925 (9'7")
----------------	----------------------------	---------------------------------------	-------------------------	-----------------------	-------------------------	----------------------------	-----------------------



* Dependant on standard or high power engine

TA6H / SH



kg

kW

km/h

mm

mm

kg

mm

TA6H	4195 (9,248 lbs)	55.4 (75 hp / 74.3 imperial hp)	24 (15 mph)	2300 (7'7")	4388 (14'5")	6000 (13,230 lbs)	3145 (10'4")
TA6SH	4335 (9,557 lbs)	55.4 (75 hp / 74.3 imperial hp)	24 (15 mph)	2211 (7'3")	4648 (15'3")	6000 (13,230 lbs)	3145 (10'4")



TA9H



kg



kW



km/h



mm



mm



kg



mm

TA9H**4760**

(10,494 lbs)

55.4

(75 hp / 74.3 imperial hp)

24

(15 mph)

2389

(7'8")

4510

(14'8")

9000

(19,840 lbs)

3615

(11'9")



B.SM-DX

CAB



kg	kW	km/h	mm	mm	kg	mm
2915 (6,426 lbs)	37 (50 hp / 49 imperial hp)	20 (12.4 mph)	1846 (6')	4012 (13')	3500 (7,720 lbs)	2663 (8'8")





CAB



S W I N G H Y D R O S T A T I C

kg	kW	km/h	mm	mm	kg	mm
4920 (10,850 lbs)	55.4 (75 hp / 74.3 imperial hp)	24 (15 mph)	2211 (7'2")	4711 (15'5")	6000 (13,230 lbs)	2875 (9'4")





CAB



S W I N G H Y D R O S T A T I C



kg



kW



km/h



mm



mm



kg



mm

5400

(11,900 lbs)

55.4

(75 hp / 74.3 imperial hp)

24

(15 mph)

2341

(7'8")

4735

(15'6")

9000

(19,840 lbs)

3384

(11'10")



REVOTRUCK

ROTATING CAB



S W I N G H Y D R O S T A T I C



kg



kW



km/h



mm



mm



kg



mm

REVOTRUCK 6	6000 (13,228 lbs)	55.4 (75 hp / 74.3 imperial hp)	30 (18.6 mph)	2300 (7'7")	4900 (16'1")	6000 (6t - 13,228 lbs)	2802 (9'2")
-------------	----------------------	------------------------------------	------------------	----------------	-----------------	---------------------------	----------------

REVOTRUCK 9	6000 (13,228 lbs)	55.4 (75 hp / 74.3 imperial hp)	30 (18.6 mph)	2450 (8')	5273 (17'8")	9000 (9t - 19,841 lbs)	2858 (9'5")
-------------	----------------------	------------------------------------	------------------	--------------	-----------------	---------------------------	----------------



MBR71



kg



kW



km/h



mm



mm



mm

513

(1,130 lbs)

7.3

(9.8 hp / 8.4 imperial hp)

4

(2.5 mph)

710

(2'3")

2187

(7'2")

1225

(4')



MECALAC FRANCE S.A.S.
2, avenue du Pré de Challes
Parc des Glaisins – CS 40230
Annecy-le-Vieux
FR - 74942 Annecy Cedex
Tel: +33 (0)4 50 64 01 63

MECALAC BAUMASCHINEN GMBH
Am Friedrichsbrunnen
D-24782 Büdelsdorf
Tel. +49(0) 4331 351 0

WWW.MECALAC.COM

MECALAC CONSTRUCTION EQUIPMENT UK LTD
Unit 1, Mallory Way
Gallagher Business Park
Coventry, CV6 6PB, UK
Tel. +44 (0)24 7633 9400

MECALAC İŞ MAKİNELERİ SAN. VE TİC. LTD. ŞTİ.
Ege Serbest Bölgesi
Zafer SB Mahallesi Gündüz Sokak No:17/1
35410, Gaziemir - İzmir - TÜRKİYE
Tel. +90 232 220 11 15



Documents and specifications subject to change without notice. Photos are not contractually binding. Machines shown in photos may have equipment additional to or different from what is locally available. To find out the options available in your region, please contact your MECALAC Dealer.
2025 MECALAC®. All rights reserved.
MK399 04/25 MECALAC RANGE

Photo credits Sémaphore, Murchow Industriefotos, Mecalac, Fotolia **Non-binding document**